

## ISO PROXIMITY CARD




### Model:INNO-ISOCARD-PROX

#### ►... Profile

This proximity card is developed based on passive RFID Technology of Low frequency (125Khz), which support ISO 18000 protocol. Widely used in a lot of industries, like security and access control system, Employee management system, Hotel management system, etc.

#### STRUCTURE

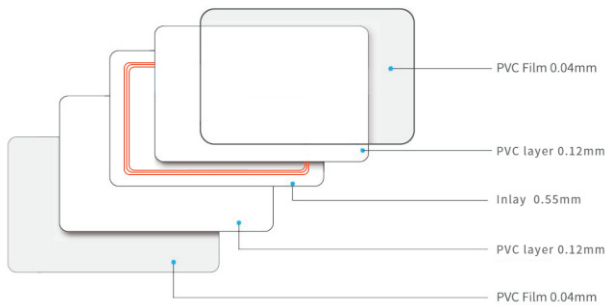

#### ►... Key Features:

- Milk white PVC material, which satisfies most people in the world.
- Printable surface for branded printers of Zebra, Datacard, Evolis, Fargo, etc.
- Price competitive with all other card technologies.
- External number for easy identification and access control.
- Customized shapes, sizes and pre-printed artworks available.

#### ►... Specification:

Physical specification	
Material	PVC/PET
Size	CR80 (85.6*54mm), customized size available
Thickness	0.86 mm
Color	Milk white (pre-printed and transparent available)
Available Crafts	Silk-screen, spray code, number printing (inkjet printing or laser engraving), etc
Performance Specification	
Frequency	13.56Mhz
Available chips	Tk4100, EM4200, EM4305, T5577, CET5577
Read/Write range	1-10CM
Protocol supported	ISO 18000

Environmental specification	
Working Temperature	-10 °C ~ 50 °C
Storage Temperature	-25 °C ~ 50 °C
Performance specification	
Packing details	
Gross weight	0.0068kgs/pcs
Package	100pcs/pack, 200pcs/box,5000pcs/carton
Carton size	52*24.5*32cm