

DUAL FREQUENCY CARD (MF+UHF)




Model:INNO-DLCARD-MU

►... Profile

This dual frequency card is developed based on passive RFID Technology of MF (13.56Mhz) and UHF (860-960Mhz), which support ISO14443A, ISO/IEC15693 and ISO18000-6C/ EPC Gen2 protocol. Widely used for payment, access control and parking system, etc.

STRUCTURE

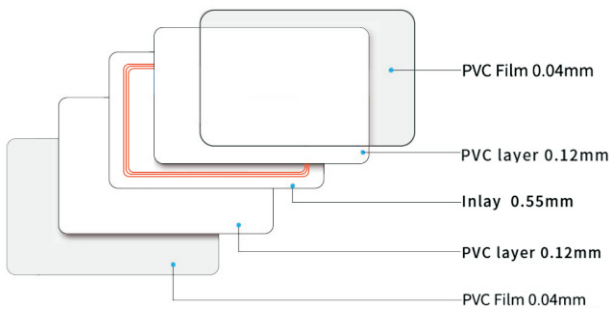

►... Key Features:

- Milk white PVC material, which satisfies most people in the world.
- Printable surface for branded printers of Zebra, Datacard, Evolis, Fargo, etc.
- Price competitive with all other card technologies.
- External number for easy identification and access control.
- Customized shapes, sizes and pre-printed artworks available.

►... Specification:

Physical specification

Material	PVC/PET
Size	85.6 *54mm (customized size available)
Thickness	0.86mm
Color	Milk white (pre-printed and transparent available)
Available Crafts	silk-screen, spray code, number printing (inkjet printing or laser engraving), etc.

Performance Specification

Frequency	13.56Mhz + 860-960Mhz
Available chips	MF (13.56Mhz): Mifare S50/S70, FM11R08/ UltralightEV1/Ultralight C/Ntag213/215/216, NXP Mifare desfireEV1 2K/4K/8K, etc.) UHF (860-960Mhz): Alien H3/H9, NXP U8/U9, etc.
Read/Write range	MF (13.56Mhz): 1-10CM UHF (860-960Mhz): 1-15M

Environmental Specification

Working Temperature	-10 °C ~ 50 °C
Storage Temperature	-25 °C ~ 50 °C

Packing details

Gross weight	0.0068kgs/pcs
Package	100pcs/pack, 200pcs/box, 5000pcs/carton
Carton size	52*24.5*32cm