




## HIGH TEMPERATURE COIN TAGS

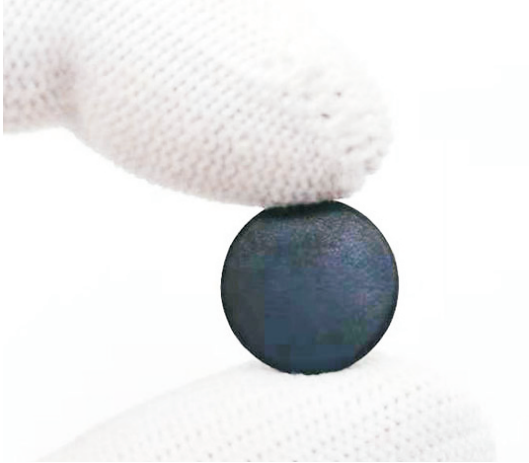

Thickness: 2 mm

### Model: INNO-CNTAG-HTD14

#### ►... Profile

This RFID coin tag is laminated with PPS material, developed and customized with very small sized antenna and chip. Which is sturdy and durable, can withstand high pressure, high temperature, waterproof, shock-proof and moisture-proof. It can be used in harsh outdoor environments with a waterproof rating of IP67.

#### ►... Key Features:

- PPS material
- Sturdy and durable, can withstand high pressure, high temperature, waterproof, shock-proof and moisture-proof
- External number for easy identification and access control.
- Customized shapes, sizes and pre-printed artworks available

#### ►... Specification:

<b>Material</b>	TPU
<b>Size</b>	Φ14mm (customized size available)
<b>Thickness</b>	2mm
<b>Color</b>	Black
<b>Available crafts</b>	silk-screen, laser engraving number, etc.
<b>Read Range</b>	0.1-2m
<b>Frequency</b>	125Khz/13.56Mhz/860-960Mhz
<b>Available chips</b>	EM (125Khz): TK4100, EM4200, EM4305, T5577, etc. MF (13.56Mhz): Mifare S50/S70, FM11R08/ UltralightEV1/Ultralight C/Ntag213/215/216, NXP Mifare desfireEV1 2K/4K/8K, etc.) UHF (860-960Mhz): Alien H3/H9, NXP U8/U9, etc.

<b>Read/Write range</b>	EM (125Khz):1-10CM MF(13.56Mhz):1-10CM UHF (860-960Mhz): 1-15M
<b>Working Temperature</b>	-50°C-200°C
<b>IP rating</b>	Ip67
<b>Gross weight</b>	0.7g
<b>Package</b>	100pcs/pack, 500pcs/box, 1000pcs/carton
<b>Carton size</b>	52*24.5*32cm