


CUSTOMIZED PROXIMITY EPOXY TAGS

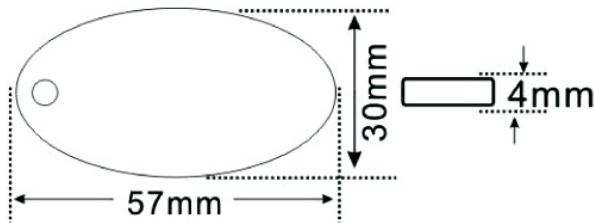

Model:INNO-EPTAG-PROX

►... Profile

This epoxy tag is developed based on passive RFID Technology low frequency of 125Khz and Epoxy crafts, its special craft makes the designs very cute, with its solid and waterproof features, Epoxy tag is becoming more and more popular in the world. Widely used for payment and access control and Gym, etc.

►... Key Features:

- Milk white PVC/PET material + Epoxy, makes finished tags very cute and lovely
- Looks higher-end qualified
- External number for easy identification and access control
- Customized shapes, sizes and pre-printed artworks available

►... Specification:

Physical specification

Material	PVC/PET+ Epoxy
Size	57*30*4mm (customized size available)
Thickness	0.86mm
Color	Milk white (pre-printed and transparent available)
Available Crafts	silk-screen, spray code, number printing (inkjet printing or laser engraving), slot punch, metal ring/elastic roles installed, etc.

Performance Specification

Frequency	125Khz
Available chips	Tk4100, EM4200, EM4305, T5577, etc.
Read/Write range	1-10CM

Environmental Specification

Working Temperature	-10 °C ~ 50 °C
Storage Temperature	-25 °C ~ 50 °C

Packing details

Gross weight	0.0075kgs/pcs
Package	100pcs/pack, 200pcs/box,5000pcs/carton
Carton size	52*24.5*32cm